

# Ready2Talk

## HS BT3 Operation info

Thank you for purchasing the Ready2Talk HS BT3 Wireless Headset.

The HS BT3 is designed to be a comfortable yet durable Wireless Headset Microphone (Mic) offering up to 12 hrs.talk time on a 3 hr. charge with a 30 ft.+ (10M+) operating range.

**Please Note:** *The HS BT3 is not designed to work with other manufacturers PA's systems.*

### Connection and Operation:

1. Connect the 4 pin microphone plug from the receiver box into your Ready2Talk PA system. You will notice the big red button on the receiver box will be flashing which indicates the receiver has power, but the headset has not yet made a radio link.
2. Turn on the headsets slide power switch and the green LED on the headset will flash. Once the receiver finds the headset in approx. 4 seconds, the headsets green LED and receivers red button will stop flashing and the microphone is ready to use. If the headset is not paired to that receiver box, the big red button on the receiver box will continue to flash indicating an issue. (see pairing instructions on pg.2)
3. Put on the headset with the headband behind your head and the bends resting over your ears. If the headband is too big or small, feel free to shape the headband to fit. Place the mic foam 1/2" to 1" away from your mouth, start talking and adjust your microphone volume as required.
4. If you want to play music while on tour? When the headset is turned on and in use, this automatically instigates the music muting function in your PA. When the headset power switch is turned off, the mute is released and the music will be heard again within a few seconds. Please refer to your PA instructions for connection information.

### Charging:

Connect the headset to the receiver box using the (included) USB to micro USB charging cable. The red charge indicator LED on the headset will glow brightly. Headset charging time will vary from minutes to approximately 3 hrs. depending on how charged the battery was at the start of the charge cycle. When fully charged the red LED will go dim.

If necessary... you can charge and use the headset at the same time. Because of the 4 to 1 charging rate, if you charge the battery for 1 hr. this equals approximately 4 hrs. of extra use. You can use most other standard USB chargers, but the charging time may vary.

**NOTE: DO NOT use the receiver boxes USB socket to charge anything other than the HS BT3 Headset (e.g. a phone) as damage will occur to the receiver box or PA!**

**NOTE: DO NOT continually charge the headset battery, charge only when needed.**

## The telltale signs that your battery is getting low are:

1. Less operating range
2. Slightly distorted sound or your voice will start to cut out.

## Pairing / Re-syncing a Headset to a different Receiver:

Your HS BT3 headset and receiver box will come pre-paired / synced, if you might want to use a different headset with a different receiver box, follow these simple steps below.

1. Turn on the headset and the green LED will flash.
2. Locate the little black button on the inside of the headset. See Image 1
3. Make sure the receiver is connected to the PA and the PA power is on. Now the big red button on the receiver box will flash. See Image 2.
4. Push and hold the little button on the headset **AND** the red flashing button on the receiver box until you hear a “Beep” from the speakers then immediately release both buttons. Wait approx. 4 seconds, both the headset green LED and red button on the receiver box will stop flashing, now you are Ready2Talk. This headset will now only work with the newly paired receiver box unless you re-pair with another in the future.
5. If you have any questions, please watch the pairing video on our home page at [www.ready2talkpa.com](http://www.ready2talkpa.com) or give us a call at 1 888 724 5351.

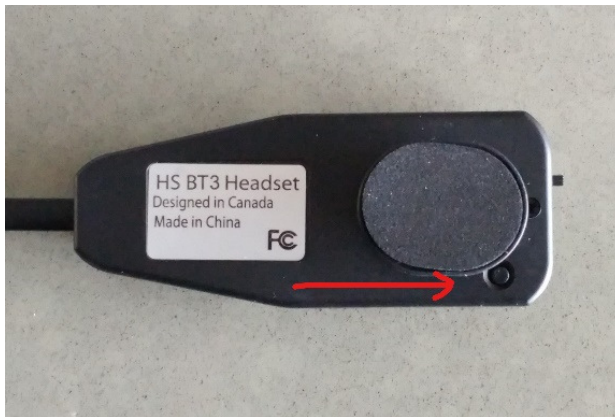


Image 1



Image 2

I hope this explains everything you wanted to know about your HS BT3, if not please give us a call at 1 888 724-5351.

Thanks again for supporting Ready2Talk and enjoy your new HS BT3 wireless headset!

Ready2Talk / Double E Products Ltd.

1 888 724-5351

[info@ready2talkpa.com](mailto:info@ready2talkpa.com)

[www.ready2talkpa.com](http://www.ready2talkpa.com)

Box 16118 / 1199 Lynn Valley Rd. North Vancouver BC Canada BC V7J

## **FCC Warning**

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

NOTE 1: This equipment has been tested and found to comply with the limits for a class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protections against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and the receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/ TV technician for help.

NOTE: 2: Any changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.